



Industrial Hose
ExtremeFlex™ Beverage Hose

ExtremeFlex™ Beverage

Enhanced flexibility for enhanced operational efficiencies

Ideal for beer, wine, distillery and beverage (edible liquid) transfer processing facilities, ExtremeFlex™ Beverage features a microbe-resistant chlorobutyl tube that does not impart taste or smell. Suited for applications requiring flexible and/or tight bend connections, ExtremeFlex™ is lightweight, flexible and easy to handle.

- › Rated for full suction
- › High working pressure
- › Better bend radius
- › Non-phthalates compound
- › Corrugated EZ Clean cover for added abrasion resistance

Application

For beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Construction

Tube: White Chlorobutyl (FDA/USDA compliant & conforms to 3-A Sanitary Standard 18-03).
Cover: Corrugated gray chemical (wrapped impression), new corrugated red EZ Clean UHMWPE cover (semi-smooth finish).
Reinforcement: Spiral-plied fabrics with double galvanized helix wire.

Temperature

-30° F to 220° F (-34° C to 104° C)

Order Codes

549-603 gray cover, 549-605 EZ Clean red cover

Couplings

Sanitary type fitting crimp specifications available.
Refer to Continental Beverage Hose Crimp Manual.



Rubber rings are available to protect your investment and ensure proper hygiene.


Take advantage of our complete line of food and beverage industry hose offerings:

- › Drinkline
- › ExtremeFlex™ Food
- › EZ Glide Wine™
- › Fortress® with Microban®*
- › Vintner™ Reserve
- › White Flexwing®

*Microban is a trademark of Microban Product Company™



ExtremeFlex™ Beverage Gray Hose Specifications*

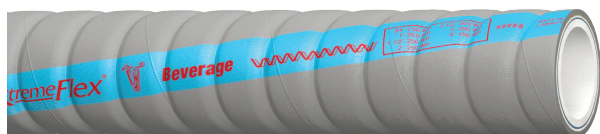

Part #	ID		OD		Working Pressure at 72°F (22°C)		Bend Radius		Vacuum at 72°F (22°C)		Weight	
	in.	mm	in.	mm	psi	MPa	in.	mm	in. Hg	mm Hg	lb./ft.	kg/m
20762678	1	25.4	1.56	39.7	250	1.72	1.5	38	29	737	0.73	1.09
20762679	1.5	38.1	2.02	51.3	250	1.72	2.3	57	29	737	0.92	1.38
20762751	2	50.8	2.53	64.2	250	1.72	3.0	76	29	737	1.20	1.79
20775985	2.5	63.5	3.07	77.9	200	1.38	4	102	29	737	1.65	2.46
20762652	3	76.2	3.59	91.2	200	1.38	4.5	114	29	737	2.02	3.01
20762653	4	101.6	4.60	116.8	150	1.03	6.0	152	29	737	2.76	4.11

Safety Factor 4:1

*Excludes EZ Clean cover

ExtremeFlex™ Beverage Red Hose Specifications



Part #	ID		OD		Working Pressure at 72°F (22°C)		Bend Radius		Vacuum at 72°F (22°C)		Weight	
	in.	mm	in.	mm	psi	MPa	in.	mm	in. Hg	mm Hg	lb./ft.	kg/m
20776605	1	25.4	1.52	38.7	250	1.72	2	51	29	737	0.65	0.96
20762754	1.5	38.1	2.03	51.6	250	1.72	3	76	29	737	0.93	1.38
20752524	2	50.8	2.537	64.5	250	1.72	4	102	29	737	1.21	1.80
20775986	2.5	63.5	3.08	78.2	200	1.38	5.5	140	29	737	1.67	2.49
20762758	3	76.2	3.601	91.5	200	1.38	6	152	29	737	2.03	3.02
20762760	4	101.6	4.607	117	150	1.03	8	203	29	737	2.77	4.12

Safety Factor 4:1

To learn how ExtremeFlex™ Beverage can benefit your beverage operations, visit www.continental-industry.com

Industrial Fluid Solutions

Market segment

Industrial Hose

Contact

Continental

703 S. Cleveland Massillon Road

Fairlawn, OH 44333-3023 U.S.A.

1-800-235-4632

www.continental-industry.com

Your local contact

www.contitech.de/contactlocator

Canada

1-888-275-4397

Mexico

1-800-439-7373



Find it at HoseSelect.com
or call **1300 RUBBER**