






SUMMER SPOTLIGHT



BEARING SOLUTIONS FOR THE AGRICULTURAL INDUSTRY

PEER is the trusted brand to the global industry leaders in agricultural and lawn and garden bearing products. PEER is a leading innovator in agricultural bearings, bringing patented maintenance-free solutions to the Industry and increasing the productivity of farmers everywhere.

Applied No.	Peer No.	Bore	ID	Seal
 CONVEYOR ROLLER BEARING Combine Harvester				
204KRR2-P	PER.204HRR2	Hexagonal	0.695"	R
205KPP2-P	PER.205HPP2	Hexagonal	0.875"	3 Lip
206KRR6-P	PER.206HRR6	Hexagonal	1.001"	R
207KRRB12-P	PER.207HRRB12	Hexagonal	1.126"	R
 DRAPER HEAD BEARING Combine Harvester				
UC206-20XXTLNSH	PER.UCN206-20XTN-A	Round	1.250"	Honey Bee
6205-2RSTFP	PER.6205-2RSTFPC3F7	Round	25mm	RSTFP

Applied No.	Peer No.	Bore	ID	Seal
 FEEDER HOUSE BEARING Combine Harvester				
W208PPB16-P	PER.W208HPPB16	Hexagonal	1.251"	3 Lip
209KRRB2-P	PER.209HRRB2	Hexagonal	1.501"	R
210PPB20-P	PER.210HPPB20	Hexagonal	1.255"	3 Lip
 PICK UP Baler				
CF5202-2RST-8	PER.205HRRB2	Hexagonal	0.875"	R
208KPPB52-P	PER.208HPPB52	Hexagonal	1.126"	3 Lip
 IDLER ROLL BEARING Baler				
W208PP21-P	PER.W208HPP21	Hexagonal	1.251"	3 Lip
W215KPP52-P	PER.W215KPP52	Hexagonal	1.506"	3 Lip
 PLUNGER BEARING Baler				
203KRR3-P	PER.CF203RRR3-B	Round	0.628"	R
205KYY3-P	PER.205RYY3	Round	0.875"	3 Lip



ROLLER CHAIN




- Solid Rollers
- Case Hardened Pins & Bushes
- Shot Peened & Thru-Hardened Link Plates

BRITISH STANDARD SIMPLEX ROLLER CHAIN



Product Name	Applied No	UOM
SKF ROLLER CHAIN BRITISH STANDARD - 1/2"	08B-1/10FT	10ft Box
SKF ROLLER CHAIN BRITISH STANDARD - 5/8"	10B-1/10FT	10ft Box
SKF ROLLER CHAIN BRITISH STANDARD - 3/4"	12B-1/10FT	10ft Box
SKF ROLLER CHAIN BRITISH STANDARD - 1"	16B-1/10FT	10ft Box

ANSI SIMPLEX ROLLER CHAIN

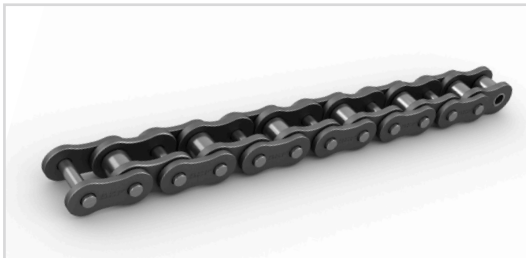

Product Name	Applied No	UOM
SKF ROLLER CHAIN ANSI - 1/2"	40-1/10FT	10ft Box
SKF ROLLER CHAIN ANSI - 5/8"	50-1/10FT	10ft Box
SKF ROLLER CHAIN ANSI - 3/4"	60-1/10FT	10ft Box
SKF ROLLER CHAIN ANSI - 1"	80-1/10FT	10ft Box

ANSI HEAVY DUTY SIMPLEX ROLLER CHAIN



Product Name	Applied No	UOM
SKF ANSI HEAVY DUTY - 5/8"	50H-1/10FT	10ft Box
SKF ANSI HEAVY DUTY - 3/4"	60H-1/10FT	10ft Box
SKF ANSI HEAVY DUTY - 1"	80H-1/10FT	10ft Box

CHAIN BREAKERS



Allows for easy dismantling of roller chains



1/4" - 3/4"

P/N: CHAIN BREAK N01



3/4" - 1-1/4"

P/N: CHAIN BREAK N02

MAINTENANCE PRODUCTS



INFRARED THERMOMETER

- Temperature range using infrared: -60 to +625 °C (-76 to +1 157 °F)
- Distance to spot size: 16:1
- Emissivity pre-set: 0,95
- Colour display with temperature trend indication

P/N: TKTL11



INFRARED THERMOMETER

- Supplied with temperature probe TMDT 2-30 (max. 900 °C (1 652 °F))
- Temperature range using infrared: -60 to +760 °C (-76 to +1 400 °F)
- Temperature range using probe: -64 to +1 400 °C (-83 to +2 552 °F)
- Distance to spot size: 30:1

P/N: TKTL21



DIGITAL TACHOMETER

The SKF TKRT 10 is a fast and accurate tachometer utilizing laser or contact to measure rotational and linear speeds.



P/N: TKRT10

LGMT2 SKF GREASE



- P/N: LGMT2/1 1kg
- P/N: LGMT2/5 5kg
- P/N: LGMT2/18 18kg

LGMT2/0.45.AU
450gm Cartridges

PORTABLE INDUCTION HEATER



P/N: TWIM15

YELAG & YARAG BEARINGS



RELUBRICATION-FREE BEARINGS WITH HIGH PERFORMANCE SEALS; INCREASE PRODUCTIVITY AND PROFITABILITY

MAIN FEATURES:

- Relubrication free
- New 5-lip seal specifically developed for agriculture applications to extend service life up to 30-50%
- The steel insert protects the bearings from solid contaminants, anchoring the complete vulcanized seal to the bearing outer ring.
- Each lip of the vulcanized seal features a different design to provide superior sealing performance in response do different operating conditions, including ring misalignment
- The outermost and innermost lips act as a labyrinth, preventing contaminant ingress and grease leakage, respectively.
- The three inner lips retain constant contact with the inner ring shoulder.
- Wide range from 20mm to 50mm bore diameter metric and inch sizes.


Contact your local Applied branch to find out more.



RENOLD ROLLER CHAINS



RENOLD

Applied No	UOM
RENOLD BRITISH 10B ROLLER CHAIN	
10B-1/10FT-A&S	10ft Box
10B-2/10FT-A&S	10ft Box
10B-3/10FT-A&S	10ft Box
RENOLD BRITISH 12B ROLLER CHAIN	
12B-1/10FT-A&S	10ft Box
12B-2/10FT-A&S	10ft Box
12B-3/10FT-A&S	10ft Box
RENOLD BRITISH 16B ROLLER CHAIN	
16B-1/10FT-A&S	10ft Box
16B-2/10FT-A&S	10ft Box
16B-3/10FT-A&S	10ft Box



Applied No	UOM
ANSI H CHAIN – 50H	
50H-1/10FT-A&S	10 ft box
ANSI H CHAIN – 60H	
60H-1/10FT-A&S	10 ft box
ANSI H CHAIN – 80H	
80H-1/10FT-A&S	10 ft box

OPTIBELT JS SPECIAL CONSTRUCTION

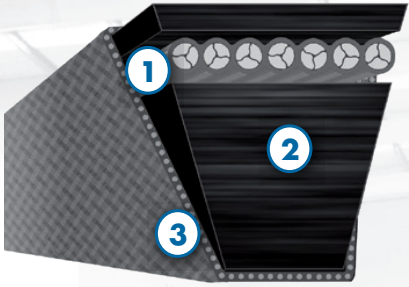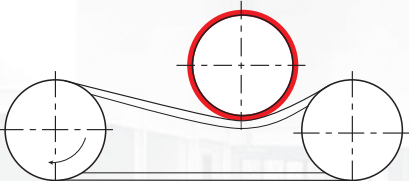




**SUITABLE
FOR
BACK BEND
IDLER**

- 1 STRONGER POLYESTER CORD**
More power transmission
More breaking load
- 2 SPECIAL SBR COMPOUND WITH ALIGNED FIBERS**
More temperature resistance (up to approx. 100 °C)
Better oil resistance
Better wear resistance
- 3 RUBBER IMPREGNATED SSG SPECIAL COVER FABRIC**
More flexible.
Better wear resistance.

SPECIFICATIONS
 Temperature Range: -30° to 100°C
 Anti-Static: ISO 1813

AVAILABLE IN PROFILE: A/13, B/17, C/22, D/32, E/40 – Single and Banded belts



OPTIBELT AGRO POWER BELTS

High quality aftermarket agricultural belt range



V-belts

Kraftbands

Ribbed Belts

Variable Speed belts

Don't let a failed belt stop you this season!

AGCO		Applied No	CLAAS		Applied No
SHAKER SHOE PITMAN DRIVE MF8560 - 8570 - 8780		AP1001604	DRUM VARIATOR BELT Lexion 400 & 500		AP1001317
UNLOADING DRIVE MF8560 - 8570 - 8780		AP1001662	CHOPPER DRIVE BELT Lexion 400 & 500		AP1003356
FINE CUT CHOPPER Gleaner S67 - S77		AP1001664	THRESHING DRUM VARIATOR DRIVE Lexion 400 & 500		AP1001228
MAIN COUNTERSHAFT DRIVE MF8780		AP1003357	HYBRID VARIABLE SPEED DRIVE Lexion 500, 600 & 700		AP1004897
CASE-IH		Applied No	JOHN DEERE		Applied No
CLEANING SYSTEM DRIVE Axial Flow 5000 - 6000 - 7000 Series		AP1004064	ROTOR DRIVE VARI SPEED - 9000STS - S600		AP1005368
BEATER DRIVE Axial Flow 7000 - 8000 - 9000 Series		AP1001853	UNLOADING AUGER DRIVE - 9000STS - S500 - S600 - S700		AP1000681
UNLOADING AUGER DRIVE Axial Flow 7000 - 8000 - 9000 Series		AP1001636	JACKSHAFT ELEVATOR DRIVE - 9000STS - S500 - S600 - S700		AP1000738
ROTARY SCREEN Axial Flow 8010 - 8120		AP1004110	CONVEYOR AUGER SHOE DRIVE - S600 - S700		AP1005367
NEW HOLLAND					Applied No
FEEDER DRIVE CR7, CR8, CR9, CR10 Series Combine					AP1001865
STRAW ELEVATOR DRIVE CR900, CR9060 & CR9080 Series Combine					AP1002036
DUST SCREEN BELT CR7, CR8, CR9, CR10 Series Combine					AP1005046
STRAW CHOPPER DRIVE CR7, CR8, CR9, CR10. Series Combine					AP1004577

CRC PRODUCT RANGE



TAC 2
Chain Lubricant
300g
P/N: 5035-CRC



BELT GRIP
Stops Belt Slippage
400g
P/N: 3081-CRC

**6+1
BONUS
PACK**



**5.56
MULTI-PURPOSE**
CRC 5-56 6+1
Promo Pack
P/N: 5005/07-CRC



AEROSTART
Starts Engines
Instantly
300g
P/N: 5051-CRC



**GLASS
CLEANER**
Sparkling Finish
500g
P/N: 3070-CRC



EVAPO-RUST
Super Safe Rust Remover
1 Litre - P/N: EVR-1L
5 Litre - P/N: EVR-5L

SKF PULLERS



HYDRAULIC PULLER KIT

- A versatile puller kit facilitates safe and easy dismantling in a variety of applications
- Hydraulic spindle facilitates easy and quick dismantling
High load rating of 100 kN (11.2 US ton)
- The strong back puller includes two different arm lengths for maximum reach of 120 mm (4.7 in.)

P/N: SKF TMHC 110E



REVERSIBLE JAW PULLERS

- An essential and versatile tool for every workshop allows for external and internal pulling applications
- Self-locking arms for easy adjustment of width of grip
- Hexagonal head on beam enables rotation of puller and bearing during dismantling, improving ease of use
- Wide gripping range from 23 mm (0.9 in.) internal to 350 mm (13.8 in.) external, enables many bearings and components to be dismantled

P/N: SKF TMHC 110E

TOLEDO AIR BLOW GUNS



- Handy and reliable unit for air cleaning work areas and equipment etc.
- Trade quality items that provide maximum air output with minimal noise
- Ergonomic design for extended use without fatigue
- Inbuilt adjustable airflow control
- Inlet: 1/4" NPT



Part No.	Nozzle Length	Nozzle Width
321101	355mm	8mm
321102	60mm	8mm
321103	120mm	6-16mm



CORROSIONX



CORROSIONX, DEVELOPED FOR AND USED WIDELY BY THE US NAVY, UTILISES A TECHNOLOGY CALLED POLAR BONDING THAT DOESN'T JUST SLOW DOWN CORROSION **IT STOPS IT COMPLETELY.**

MAIN FEATURES:

- Penetrates, lubricates, and protects against corrosion
- Waterproofs old and new electronics/electrics in all machinery, trucks and vehicles
- Safe to 39,000V
- Will not harm rubber, insulation, neoprene, and all plastics. Safe on Hoses and Seals
- Unlimited shelf life
- Non-flammable (aside from the Aerosol propellant) and can be welded over
- Large coverage. 1 litre will cover approximately 90m²

CORROSIONX		Applied No
CORROX RED AEROSOL 60Z		90101-CORROX
CORROX RED AEROSOL 160Z		90102-CORROX
CORROX RED TRIGGER 160Z		91002-CORROX
CORROX RED 1 GALLON		94004-CORROX
CORROX RED 5 GALLON		94005-CORROX

CORROSIONX HD		Applied No
CORROX HD AEROSOL 120Z		90104-CORROX
CORROX HD TRIGGER 160Z		96103-CORROX
CORROX HD 1 GALLON		96004-CORROX
CORROX HD 5 GALLON		96005-CORROX

CORROSIONX XD		Applied No
CORROX XD AEROSOL 160Z		97102-CORROX
CORROX XD TRIGGER 160Z		97103-CORROX
CORROX XD 1 GALLON		97004-CORROX
CORROX XD 5 GALLON		97005-CORROX

CORROSION GREASE

150Z
P/N: 96801-CORROX

5 GALLON
P/N: 96805-CORROX

16 GALLON
P/N: 96820-CORROX

REJEX

APPLICATOR BOTTLE 160Z
P/N: 61002-REJEX

1 GALLON
P/N: 61004-REJEX

XTREME CLEAN

TRIGGER 160Z
P/N: 24103-XTRCLEAN

1 GALLON
P/N: 24104-XTRCLEAN



TIMKEN-FAFNIR IDLER SPROCKETS

TIMKEN

MAIN FEATURES:

- The sintered-steel sprockets are hardened and perform well at an economical cost.
- The roller chain idler sprocket replaces the hardened plate steel sprockets on most applications.
- All units are non-relubricatable.

P/N: 010-4018-S

P/N: 010-5017-S

P/N: 010-6015-S`

P/N: 012-8012-S`




TIMKEN 454 SERIES TRUCK TAPERED ROLLER SET

TIMKEN

Engineered with performance-enhancing features, Timken® 454-Series® wheel bearings offer extended fatigue life for the toughest applications, including waste management and logging / off-highway vehicles.

- Available for manually adjusted or pre-adjusted Timken Set-Right® hubs
- Can handle the 2 inch outset loads created by wide single tire configurations

Product Name	Applied No
UPGRADED SET413 - HM212049/11	SET440
UPGRADED SET414 - HM218248/10	SET441
UPGRADED SET415 - HM518445/10	SET444
UPGRADED 33213	SET997
UPGRADED 33118	SET998

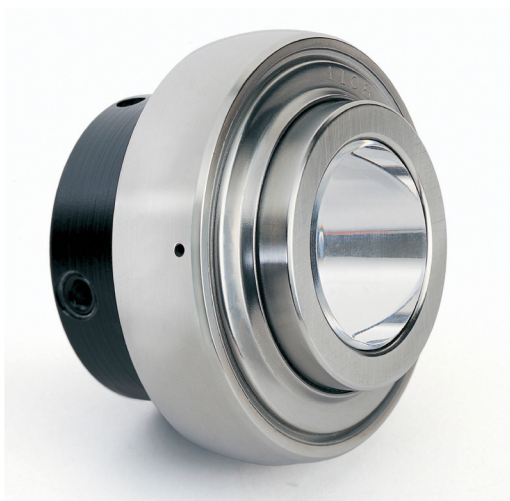

TIMKEN HEAVY DUTY WIDE INNER RING BEARINGS


TIMKEN


Product Name	Applied No
HEAVY SERIES WIR BALL BEARING - 1-3/8"	GN106KRRB
HEAVY SERIES WIR BALL BEARING - 1-1/2"	GN108KRRB
HEAVY SERIES WIR BEARING BEARING - 1-3/4"	GN112KRRB
HEAVY SERIES WIR BEARING - 1-15/16"	GN115KRRB
HEAVY SERIES WIR BEARING - 2-3/16"	GN203KRRB


CONTINENTAL HOSE RANGE



CONTINENTAL PLICORD® EXTREMEFLEX™ PETROLEUM TRANSFER	Product Name	P/N
<p>APPLICATION: An extremely flexible and lightweight drop hose for use in tank truck and in-plant operation to transfer diesel, ethanol, gasoline, oil and petroleum base products</p> 	Extremflex Petrol 3/4"	PLICORD-EP3/4
	Extremflex Petrol 1"	PLICORD-EP1
	Extremflex Petrol 1-1/4"	PLICORD-EP1-1/4
	Extremflex Petrol 1-1/2"	PLICORD-EP1-1/2
	Extremflex Petrol 1-3/4"	PLICORD-EP1-3/4
	Extremflex Petrol 2"	PLICORD-EP2
	Extremflex Petrol 3"	PLICORD-EP3/4
	Extremflex Petrol 4"	PLICORD-EP4


CONTINENTAL PLICORD® EXTREMEFLEX™ VERSIFLO 150	Product Name	P/N
<p>APPLICATION: A general purpose water suction and discharge hose. It can be used in various industrial applications, as well as Agricultural applications.</p> 	Extremflex Versiflo 150 - 1"	PLICORD-EV1
	Extremflex Versiflo 150 - 1-1/4"	PLICORD-EV1-1/4
	Extremflex Versiflo 150 - 1-1/2"	PLICORD-EV1-1/2
	Extremflex Versiflo 150 - 2"	PLICORD-EV2
	Extremflex Versiflo 150 - 2-1/2"	PLICORD-EV2-1/2
	Extremflex Versiflo 150 - 3"	PLICORD-EV3

BLUE XTREME STRAIGHT RADIATOR HOSE	Product Name	P/N
<p>APPLICATION: Designed for common coolants and straight radiator connections where higher heat resistance and longer life are desired.</p> 	Blue Xtreme Straight Radiator - 1-1/2"	57228
	Blue Xtreme Straight Radiator - 1-7/8"	57230
	Blue Xtreme Straight Radiator - 2"	57232
	Blue Xtreme Straight Radiator - 2-1/8"	57234
	Blue Xtreme Straight Radiator - 2-1/4"	57236
	Blue Xtreme Straight Radiator - 2-3/8"	57238
	Blue Xtreme Straight Radiator - 2-1/2"	57240
	Blue Xtreme Straight Radiator - 2-5/8"	57242
	Blue Xtreme Straight Radiator - 2-3/4"	57244
	Blue Xtreme Straight Radiator - 3"	57248
	Blue Xtreme Straight Radiator - 3-1/2"	57256
	Blue Xtreme Straight Radiator - 4"	57264

CONTINENTAL BLUE HEATER HOSE	Product Name	P/N
<p>APPLICATION: Designed for heater hose applications that are exposed to higher underhood temperatures and require a higher heat resistance.</p> 	Blue Xtreme Heater Hose - 3/8"	ELITE-BLUE-3/8
	Blue Xtreme Heater Hose - 1/2"	ELITE-BLUE-1/2
	Blue Xtreme Heater Hose - 5/8"	ELITE-BLUE-5/8
	Blue Xtreme Heater Hose - 3/4"	ELITE-BLUE-3/4
	Blue Xtreme Heater Hose - 1"	ELITE-BLUE-1

EWELLIX ACTUATORS

EWELLIX

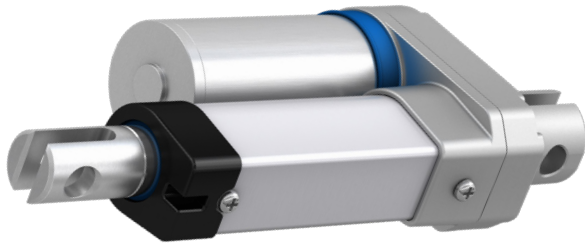

**CAHB-10
LINEAR ACTUATOR**

BENEFITS:

- Compact design
- Designed for harsh environment
- Robust and reliable
- Intergrated limit switches
- Thermal protection
- Optional potentiometer and 2-hall encoder available
- Electromagnetic compatibility (EMC) compliant

Voltage: 12 or 24V
Stroke: 50mm to 300mm
Load: 120N to 1500N



**CAHB-20A
LINEAR ACTUATOR**

BENEFITS:

- ACME screw drive
- Extension tube (stainless steel)
- Protection tube (steel)
- Enhanced corrosion resistance
- Mechanical overload protection (clutch)
- Lubricated for service life
- Robust, designed for tough environment
- Self Locking
- Certified (CE: EN 55011)

Voltage: 12 or 24V
Stroke: 100mm to 600mm
Load: 1500N & 2500N

LOCTITE RANGE

LOCTITE



**SF 7063
PARTS CLEANER**

400ml Aerosol

P/N: 2440509-LOC



**LB 8009
HEAVY DUTY
ANTI SEIZE**

510g Metal Free


P/N: 51606-510G-LOC



**LB 8040 FREEZE
& RELEASE**

310gm Aerosol

P/N: FAR-310GM-LOC



**LB8017
MOLY DRY FILM**

340gm Aerosol

P/N: 39895-340G-LOC



**ORANGE
HAND CLEANER**

P/N: SF7850-4L



**EA 3463
METAL MAGIC**

113gm

P/N: 98853-113G-LOC



LUBRICATION PRODUCTS



LINCOLN 450GM PISTOL GREASE GUN

P/N: 01-001133AUS



LINCOLN 20V POWERLUBER GREASE GUN 450GM

P/N: 01-001882AUS



LINCOLN PREMIUM EXTENSION HOSE WITH COIL SPRING

Anti-kink spring, 310 bar, 1/8" NPT M, 305mm

P/N: 01-005812

Anti-kink spring, 310 bar, 1/8" NPT M, 457mm

P/N: 01-005818



FAICOM GREASE PUMP CARRY KIT

Kit includes pump, lid, follower plate, hose and control valve.

Drum: 18 - 30kg
Compression Ratio: 58:1
Delivery: 600g/min

P/N: 48-KP7247P



LINCOLN POWERLOCK GREASE GUN COUPLER

1/8" NPT

P/N: 01-005900



MASPEL 20L OIL PUMP

- Downstroke operation
- Versatile pump
- Heavy duty steel suction tube

P/N: 16-112930

JSG GREASE NIPPLE HEADER BLOCKS

	Applied No	Product Name
	03NIPPLEBLOCK-2	Header block, 2 outlet c/w grease nipples (no fittings)
	03NIPPLEBLOCK-3	Header block, 3 outlet c/w grease nipples (no fittings)
	03NIPPLEBLOCK-4	Header block, 4 outlet c/w grease nipples (no fittings)
	03NIPPLEBLOCK-5	Header block, 5 outlet c/w grease nipples (no fittings)
	03NIPPLEBLOCK-6	Header block, 6 outlet c/w grease nipples (no fittings)
	03NIPPLEBLOCK-8	Header block, 8 outlet c/w grease nipples (no fittings)

LINCOLN MANUAL CENTRALISED LUBRICATION KITS

	Applied No	Product Name
	04-239506-FN	Manual Centralised Lubrication Kit - 6 Point
	04-239508-FN	Manual Centralised Lubrication Kit - 8 Point
	04-239510-FN	Manual Centralised Lubrication Kit - 10 Point
	04-239512-FN	Manual Centralised Lubrication Kit - 12 Point
	04-239514-FN	Manual Centralised Lubrication Kit - 14 Point
	04-239516-FN	Manual Centralised Lubrication Kit - 16 Point


DON DYE IDLER PULLEYS




SINGLE ROW FLAT IDLERS

	Product Name	Applied No
	Flat Idler 2-3/4" Face Dia - 3/4" Width - 3/8" Bore	ABFI-54M06
	Flat Idler 4" Face Dia. - 1" Width - 1/2 & 5/8" Bore	BCFI-76
	Flat Idler " Face Dia. - 1" Width - 1/2 & 5/8" Bore	BCFI-92
	Flat Idler 8" Face Dia. - 1-1/2" Width - 1/2 & 5/8" Bore	DFI-144

SINGLE ROW V IDLERS

	Product Name	Applied No
	V-Idler 4" Dia. - A Section - 1/2 & 5/8" Bore	AVI-64
	V-Idler 3-3/4" Dia. - B Section - 1/2 & 5/8" Bore	BVI-60
	V-Idler 5-1/4" Dia. - C Section - 1/2 & 5/8" Bore	CVI-84
	V-Idler 8-1/2" Dia. - 5V Section - 1/2 & 5/8" Bore	5VI-137

DOUBLE ROW FLAT IDLERS

	Product Name	Applied No
	Flat Idler 5" Dia. - 2" Width	208032080
	Flat Idler 5" Dia. - 3-1/4" Width	208052080
	Flat Idler 6-1/2" Dia. - 2-1/4" Width	210436104
	Flat Idler 8" Dia. - 3-1/4" Width	212852128

Available with 1/2" - 5/8" or 3/4" Bore

DOUBLE ROW FLANGED IDLERS

	Product Name	Applied No
	Flanged Idler 5" Dia. - 2" Wdth	208032092
	Flanged Idler 8" Dia. - 2" Wdth	212832144
	Flanged Idler 8" Dia. - 2-5/8" Wdth	212842160
	Flanged Idler 8" Dia. - 3-1/4" Width	212852160


Available with 1/2" - 5/8" or 3/4" Bore

FYH PILLOW BLOCK

THE BEST PILLOW BLOCK EVER

The new FYH original solid base pillow block housings seat better and produce a more stable mounting configuration that significantly reduces vibration.


The support ribs have been eliminated to make more room for mounting bolts and washers, yet these housings are **more than 30% stronger** than before while also reducing housing weight.

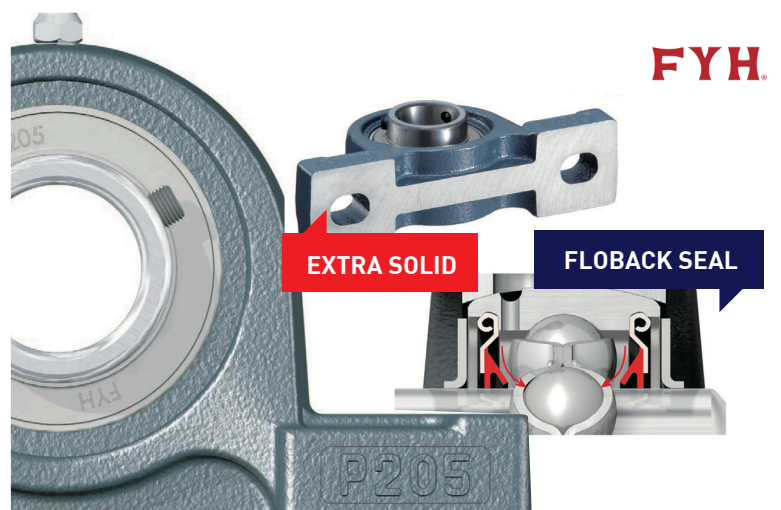

OPTIBELT CHAIN COUPLINGS



- High performance
- Low maintenance
- High torque
- Durable

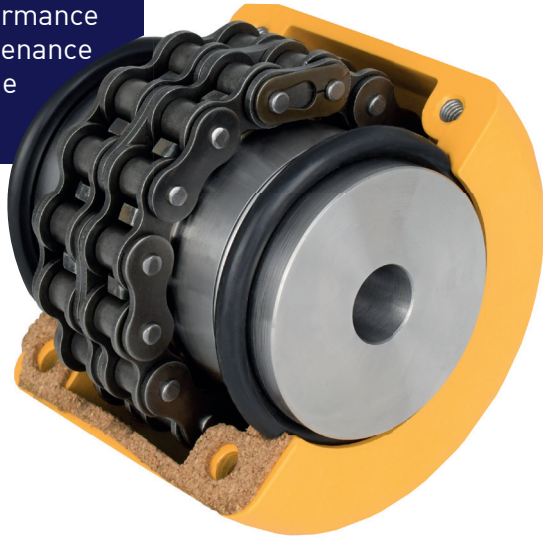

Product Name	Applied No
CHAIN COUPLING WITH COVER 1/2" X 16T - PILOT BORE	CC4016
CHAIN COUPLING WITH COVER 5/8" X 16T - PILOT BORE	CC5016
CHAIN COUPLING WITH COVER 5/8" X 18T - PILOT BORE	CC5018
CHAIN COUPLING WITH COVER 3/4" X 18T - PILOT BORE	CC6018
CHAIN COUPLING WITH COVER 3/4" X 22T - PILOT BORE	CC6022
CHAIN COUPLING WITH COVER 1" X 18T - PILOT BORE	CC8018
CHAIN COUPLING WITH COVER 1" X 22T - PILOT BORE	CC8022

CASTROL



RX SUPER

20 LITRE
P/N: 3418280-CASTROL

205 LITRE:
P/N: 3418279-CASTROL



AGRI AS TRANS PLUS

80 W 20 LITRE
P/N: 3379399-CASTROL

80 W 205 LITRE
P/N: 3379400-CASTROL



SIA ABRASIVE DISCS



CUTTING DISCS - 25 Pack

C/O Wheel 8913 125x1x22.2mm Inox
P/N: 0020.8724.01

C/O Wheel 8913 125x1.6x22.2mm Inox
P/N: 0020.8725.01

C/O Wheel 8913 125x2.5x22.2mm
P/N: 0020.8726.01

C/O Wheel 8913 125x1x22.2mm Alu
P/N: 0020.8727.01



Extra Course
6924 125X22mm
P/N: 9268.9620.1923




Coarse
6924 125X22mm
P/N: 9268.9620.2923



Medium
6924 125X22mm
P/N: 9268.9620.4923

SCM NON WOVEN DISC
25 pack



ZIRCONIA FLAP DISCS - 25 Pack

Flap Disc 2824 125x22.23mm P40
P/N: 0020.2657.01

Flap Disc 2824 125x22.23mm P60
P/N: 0020.2659.01

Flap Disc 2824 125x22.23mm P80
P/N: 0020.2661.01

Flap Disc 2824 125x22.23mm P120
P/N: 0020.2680.01



STRIP NON WOVEN DISC
10 pack

6300 125X22mm
X-Lock

P/N: 0643.1561.1721



GRINDING DISCS - 10 Pack

Grinding Wheel 8933 125x6x22.2mm
P/N: 0020.8735.01

Grinding Wheel 8933 125x6x22.2mm Steel
P/N: 0020.8739.01




BACKING PAD

Fibre 125mm
M14 Soft
P/N: 0020.0350

Fibre 125mm
M14 Hard
P/N: 0020.8415

CERAMIC FIBRE DISCS

25 Pack

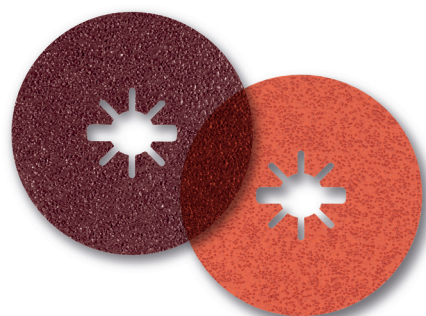

Product Name	Applied No
Mild Steel	
Fibre Disc 4581 125x22mmX-Lock P36	7142.8050.0036.01
Fibre Disc 4581 125x22mmX-Lock P60	7142.8050.0060.01
Fibre Disc 4581 125x22mmX-Lock P80	7142.8050.0080.01
Stainless Steel	
Fibre Disc 4582 125x22mmX-Lock P36	7155.7602.0036.01
Fibre Disc 4582 125x22mmX-Lock P60	7155.7602.0060.01
Fibre Disc 4582 125x22mmX-Lock P80	7155.7602.0080.01
Fibre Disc 4582 125x22mmX-Lock P120	7155.7602.0120.01

APPLIED® LOCATIONS IN NEW ZEALAND

CN 1819



• AUCKLAND

Head Office & Branch
67 Lady Ruby Drive,
East Tamaki, Auckland 2013
P: (09) 274 0056
nz-auckland@appliednz.com

• CHRISTCHURCH

Unit 8, 303 Blenheim Road
Upper Riccarton, Christchurch 8041
P: (03) 341 6537
nz-christchurch@appliednz.com

• NEW PLYMOUTH

Unit 1, 37 Hurlstone Drive
Waiwhakaiho, New Plymouth 4312
P: (06) 769 5152
nz-newplymouth@appliednz.com

• HASTINGS

1206 Omahu Road, Hastings 4175
P: (06) 879 4362
nz-hastings@appliednz.com

• LOWER HUTT

22 Waione Street,
Lower Hutt, Wellington 5012
P: (04) 569 3159
nz-wellington@appliednz.com

• DUNEDIN

4-6 McBride Street,
Dunedin 9012
P: (03) 455 5652
nz-dunedin@appliednz.com

• PALMERSTON NORTH

601D Tremaine Avenue
Palmerston North 4410
P: (06) 356 9145
nz-palmerstonnorth@appliednz.com

• ROTORUA

47 White Street,
Fenton Park, Rotorua 3010
P: (07) 349 2451
nz-rotorua@appliednz.com



SCAN THE QR CODE & CONNECT WITH US



Follow us



Join Our Network



Become A Fan



VISIT APPLIEDNZ.CO.NZ

Contact an Applied® representative today!